

DATA SHEET

Opti-S Combipack

Material:



Polypropylen (PP), recycled



PVC- free (Variant 1), CFC- and HFC-free

Product information :



Ready assembled wall spacer with plastic cone with 10 mm concrete cover. For vertical formworks with testing on water resistance (using the Opti-S stopper), fire behaviour and chemical resistance for exposed concrete walls.




We recommend the use of our sealing rings for optimal results with exposed concrete walls.



The wall thickness embossed in the Opti-S (not available with the pre-assembled version) prevents the risk of confusion during use. The Opti-S stoppers are included.



Packaging units and dimensions available (Other lengths as pre-assembled version on request):

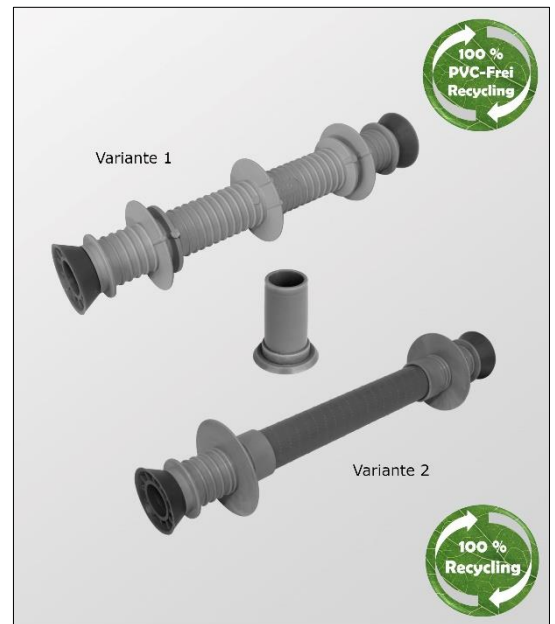

	ITEM NUMBER	LENGTH Dimension in mm	BAG PU in piece	PALLET PU in piece
* Variant 1	201.SK175	175	100	3.600
	201.SK180	180	100	3.600
	201.SK200	200	100	3.200
	201.SK220	220	100	3.200
	201.SK240	* 240	100	3.200
	201.SK250	* 250	100	3.200
	201.SK300	* 300	100	3.200
	201.SK350	350	75	2.400
	201.SK360	360	75	2.400
	201.SK365	365	75	2.400
	201.SK400	400	75	2.400
	201.SK450	450	50	1.600
	201.SK500	500	50	1.600

Note:

This data sheet contains basic information about our products.
Its contents have been compiled with the utmost care and are continually updated.
We therefore reserve the right to make changes of any kind.
Please do not hesitate to contact us personally for further information.

Version 08/2024

