

DATA SHEET



Quix


Material :



Polyolefine (PO), recycled



PVC-, CFC- and HFC-free

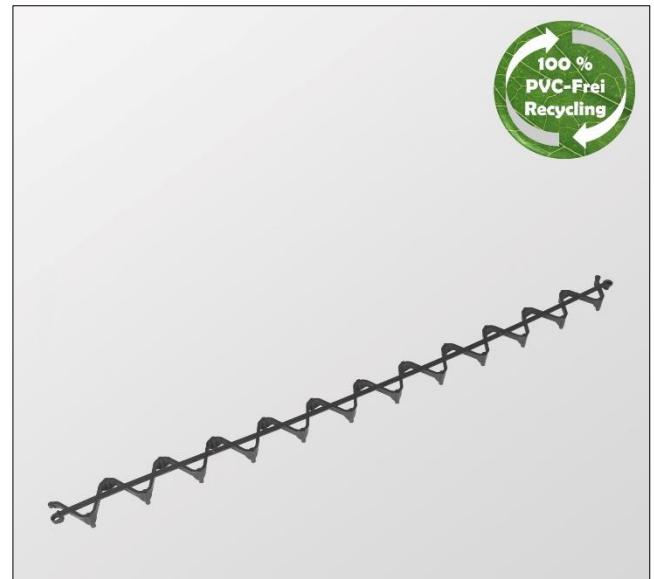

Product information:



Wavelike spacer with a good concrete flow for horizontal formworks with a width of 60 mm.



Large cut-outs and displaced supporting surfaces on the formwork prevent blowholes even when using the coarse-grained concrete.



Endless extension and twistable through plug-in connections.



Small contact area on the formwork due to the slightly rounded feet and therefore ideal for fair-faced concrete applications.



Packaging units and dimensions available:

ITEM NUMBER	CONCRETE COVER Dimension in mm	BUNDLE PU in m	PALLET PU in m
353.020	20	100	3.600
353.025	25	100	3.200
353.030	30	100	2.800
353.035	35	100	2.800
353.040	40	100	2.400
353.050	50	100	1.600

Note:

This data sheet contains basic information about our products.
Its contents have been compiled with the utmost care and are continually updated.
We therefore reserve the right to make changes of any kind.
Please do not hesitate to contact us personally for further information.

Version 09/2024

