

DATA SHEET




WellFix

Material :

 Polyolefine (PO), recycled

 PVC-, CFC- and HFC-free

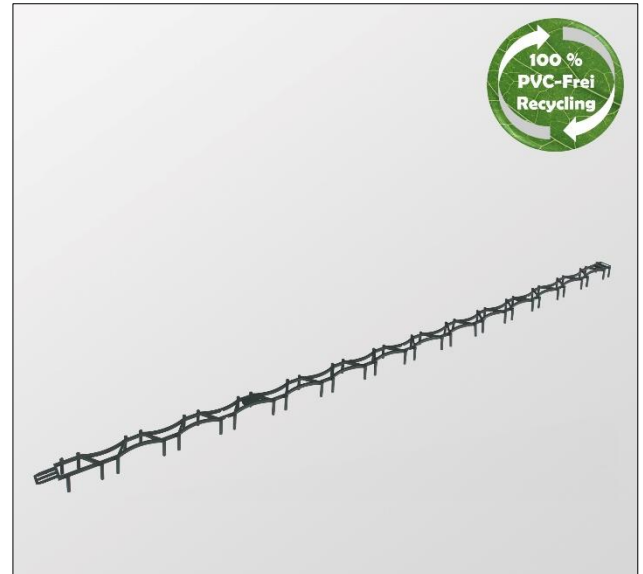

Product information :

 Slightly wavelike, PVC-free spacer with a very good concrete flow for the use in precast work. Quick and easy shortening is possible without any tool in a grid of 30 cm

 Less and small contact points on the formwork give slight visible imprints on the precast concrete element. Tilt-proof due to a width of approximately 40 mm. The form of the spacer guarantees an efficient packaging without distortion.

 Tested according to DBV data sheet "Abstandhalter" – Eurocode 2, version November 2019.

 Packaging units and dimensions available:

ITEM NUMBER	CONCRETE COVER Dimension in mm	BUNDLE PU in m	PALLET PU in m
Length 122,5 cm			
354.015	15	98	5.292
354.020	20	98	4.704
354.025	25	98	4.704
354.030	30	98	4.116
354.035	35	98	3.528
354.040	40	58,8	2.822
354.045	45	58,8	2.822
354.050	50	58,8	2.822
Length 245 cm			
354.015l	15	196	10.548
354.020l	20	196	9.408
354.025l	25	196	9.408
354.030l	30	196	8.232
354.035l	35	196	7.056
354.040l	40	117,6	5.645
354.045l	45	117,6	5.645
354.050l	50	117,6	5.645

Note:

This data sheet contains basic information about our products.
 Its contents have been compiled with the utmost care and are continually updated.
 We therefore reserve the right to make changes of any kind.
 Please do not hesitate to contact us personally for further information.

Version 09/2024

