

DATA SHEET

ISO spacer

Material:



Polyethylen (PE), recycled



PVC-, CFC- and HFC-free

Product information:



Stable, clip-safe spacer for the use on soft grounds.




Flexible areas of application by 2 usable concrete roofs per spacer.



Lateral and large openings offer good concrete flow



Packaging units and dimensions available:

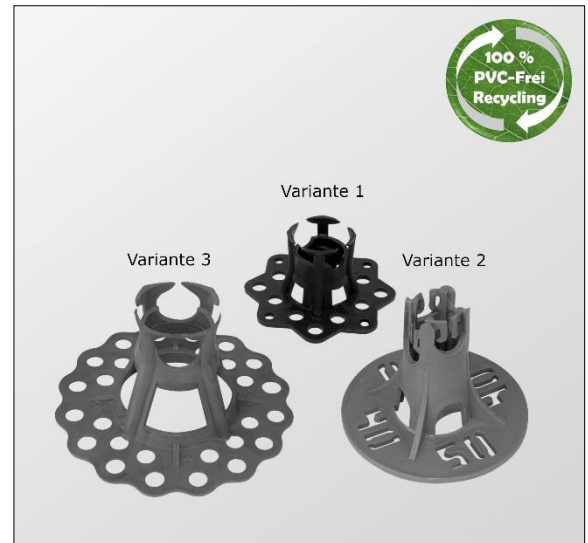

ITEM NUMBER	CONCRETE COVER Dimension in mm	CLAMPING AREA Dimension in mm	SUPPORT SURFACE Dimension in mm	BAG PU in piece	PALLET PU in piece
367.1520	*1 15 + 20	6-16	88	500	17.000
367.2530	*1 25 + 30	6-16	88	400	8.000
367.4050	*2 40 + 50	6-12	90	200	4.000
367.4050g	*3 40 + 50	6-16	118	200	4.000

*1 Variante 1

*2 Variante 2

*3 Variante 3

Note:

This data sheet contains basic information about our products.
Its contents have been compiled with the utmost care and are continually updated.
We therefore reserve the right to make changes of any kind.
Please do not hesitate to contact us personally for further information.

Version 09/2024

