

DATA SHEET

Plug-in spacer


Material:



Polyethylen (PE), recycled



PVC-, CFC- and HFC-free

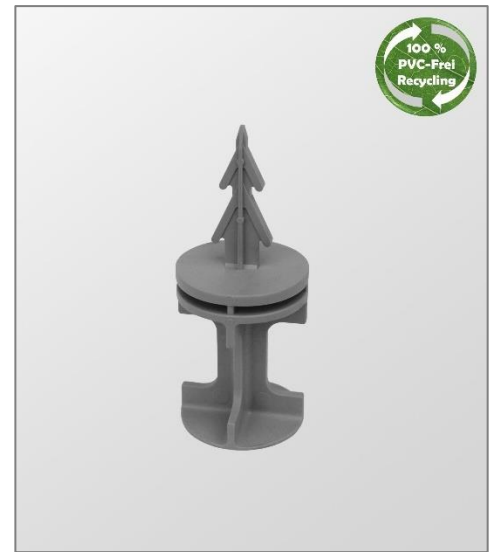

Product information:



Robust spacer for concreting into the L-stones.



Due to the predetermined breaking point, it can be separated with a hammer after use.



Packaging units and available dimensions:

ITEM NUMBER	LENGTH Dimension in mm	EMBEDMENT DEPTH Dimension in mm	OVERHANG Dimension in mm	BAG PU in piece	PALLET PU in piece
903.steck	100	50	50	750	15.000

Note:

This data sheet contains basic information about our products.
Its contents have been compiled with the utmost care and are continually updated.
We therefore reserve the right to make changes of any kind.
Please do not hesitate to contact us personally for further information.

Version 09/2024

