


DATA SHEET

WellFix with nubs

Material:

RÜDE Polyolefine (PO), recycled

RÜDE PVC-, CFC- and HFC-free

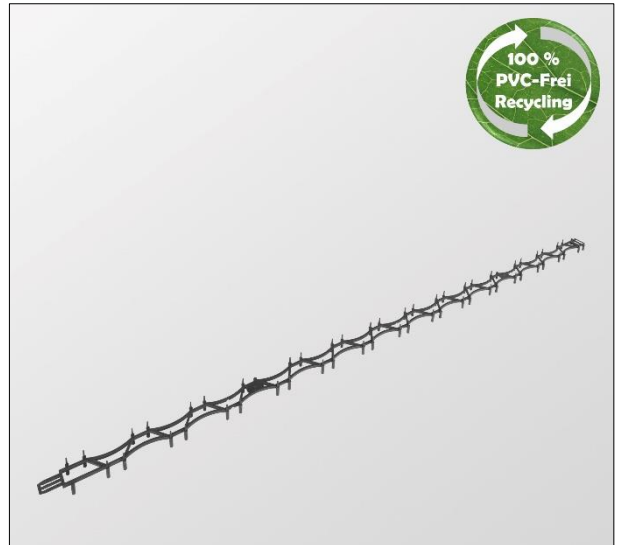

Product information:

RÜDE Slightly wavelike, PVC-free spacer with nubs for the use in precast work. Nubs on the top avoid the moving of the reinforcement during concreting. Quick and easy shortening is possible without any tool in a grid of 30 cm.

RÜDE Less and small contact points on the formwork gives slight visible imprints on the precast concrete element. Tilt-proof due to a width of approximately 40 mm. The form of the spacer guarantees an efficient packaging without distortion

RÜDE Tested according to DBV data sheet "Abstandhalter" – Eurocode 2, version November 2019.

RÜDE Packaging units and dimensions available:

ITEM NUMBER	CONCRETE COVER Dimension in mm	BUNDLE PU in m	PALLET PU in m
Length 122,5 cm			
354.015n	15	73,5	4.851
354.020n	20	73,5	3.969
354.025n	25	73,5	3.528
354.030n	30	73,5	3.087
354.035n	35	73,5	3.087
354.040n	40	58,8	2.822
354.045n	45	58,8	2.822
354.050n	50	58,8	2.469
Length 245 cm			
354.015nl	15	147	9.702
354.020nl	20	147	7.938
354.025nl	25	147	7.056
354.030nl	30	147	6.174
354.035nl	35	147	6.174
354.040nl	40	117,6	5.645
354.045nl	45	117,6	5.645
354.050nl	50	117,6	4.939

Note:

This data sheet contains basic information about our products.
Its contents have been compiled with the utmost care and are continually updated.
We therefore reserve the right to make changes of any kind.
Please do not hesitate to contact us personally for further information.

Version 09/2024

